

DATA SHEET




S6EXP0040-199

BEAMEXPANDER
MAGNIFICATION 4,0
FOR 266 nm
FUSED SILICA




OUTLINE DRAWING

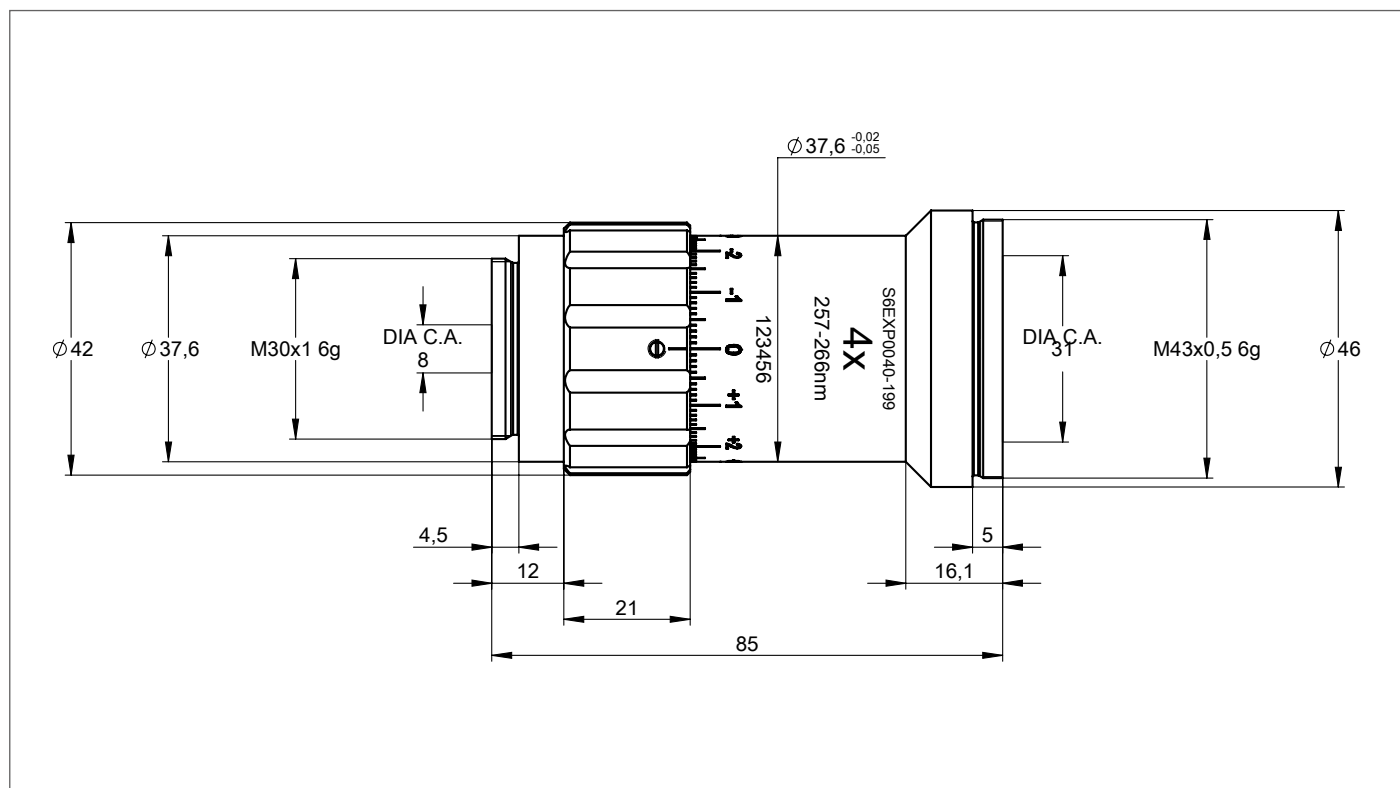


SPECIFICATIONS

article number	S6EXP0040-199
design wavelength [nm]	266
magnification factor	4,0
divergence adjustable	yes
optical principle	Galilei (no internal focus)
pointing stability [mrad]	< 1
clear input aperture [mm]	8.0
clear output aperture [mm]	31.0
recommended beam-Ø [mm] ¹⁾	5.5
total number of lenses	3
total transmission [%]	>98
lens material	fused silica
LIDT (coating) [J/cm²]	0.5 J/cm² per 1ns pulse at 50Hz
SP and USP usable	yes
SP and USP usable, reversed usage	no
mounting thread	
weight [kg]	0.2
accessory	

DIVERGENCE ADJUSTMENT

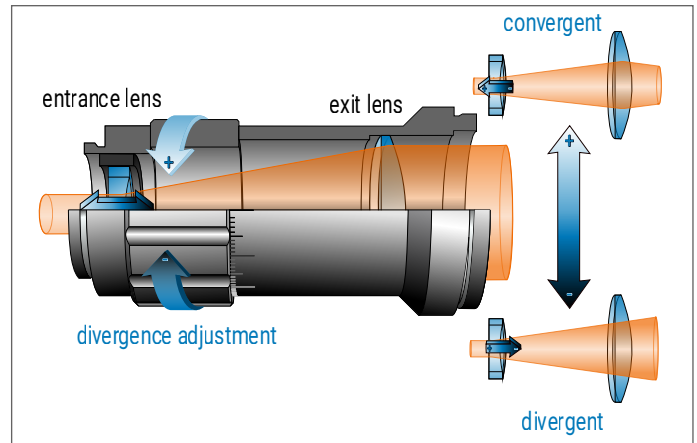

MOUNTING POSITIONS

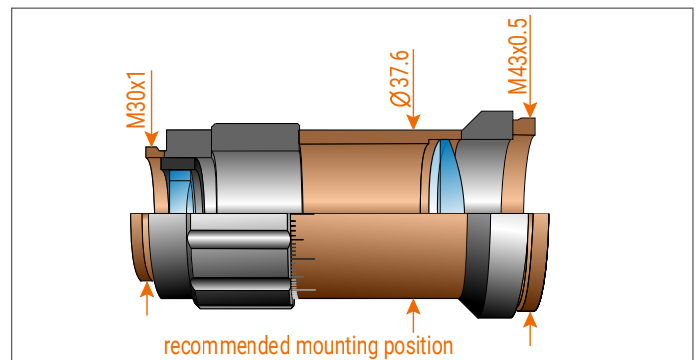

REMARKS

¹⁾clipped at $1/e^2$; wavefront error on axis (PV) < $\lambda/10$ (value provided by design)

magnification (reversed mode) = 1 / magnification (regular mode)


divergence adjustment = 0 → collimated input beam results in collimated output beam

maximum divergence adjustment is ± 3 mm

RoHS compliant

length at divergence setting „0“ stated in the drawing - length extension of max. 3 mm is possible

BACK REFLECTION POSITION

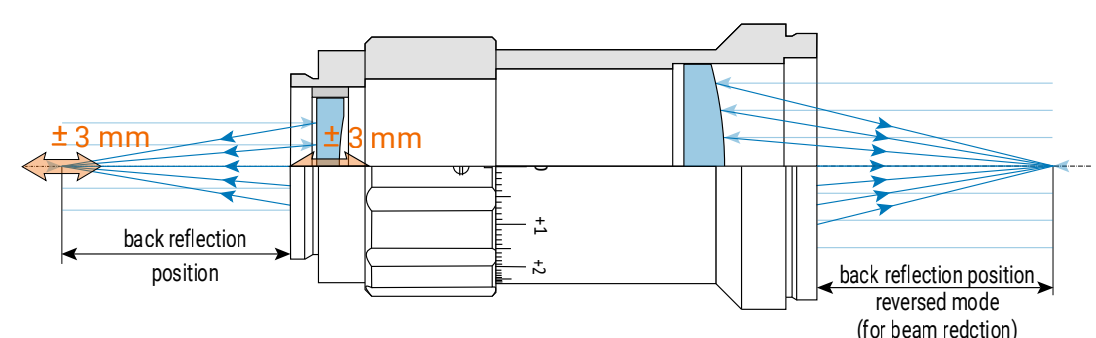back reflections [mm]	
5.1	
back reflections reverse [mm]	
33.29	
6.60	
0.00	